




FACE OF SIGN PANEL

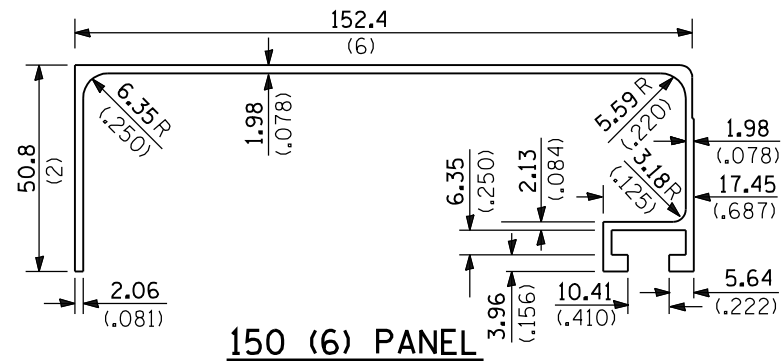


150 (6) PANEL

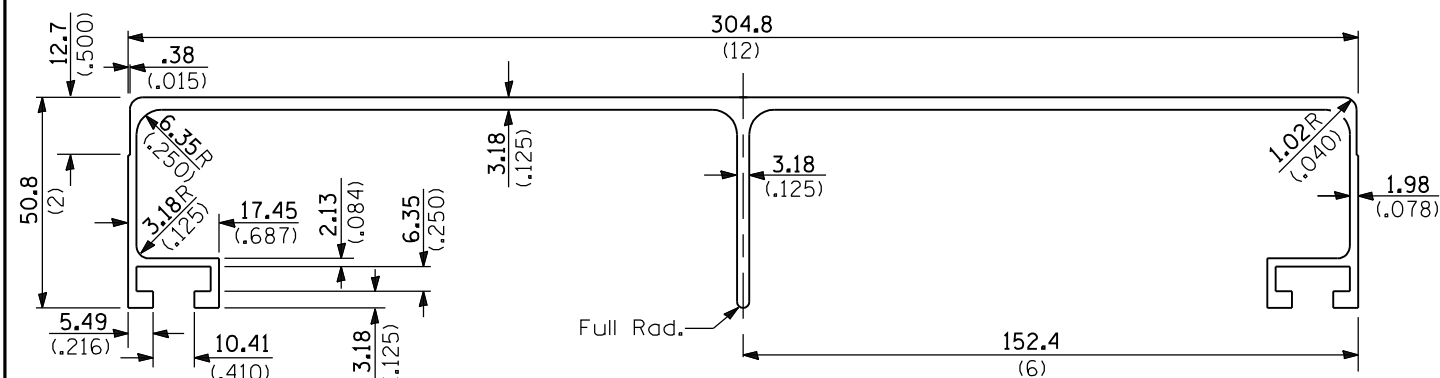


TYPE B SIGN PANEL

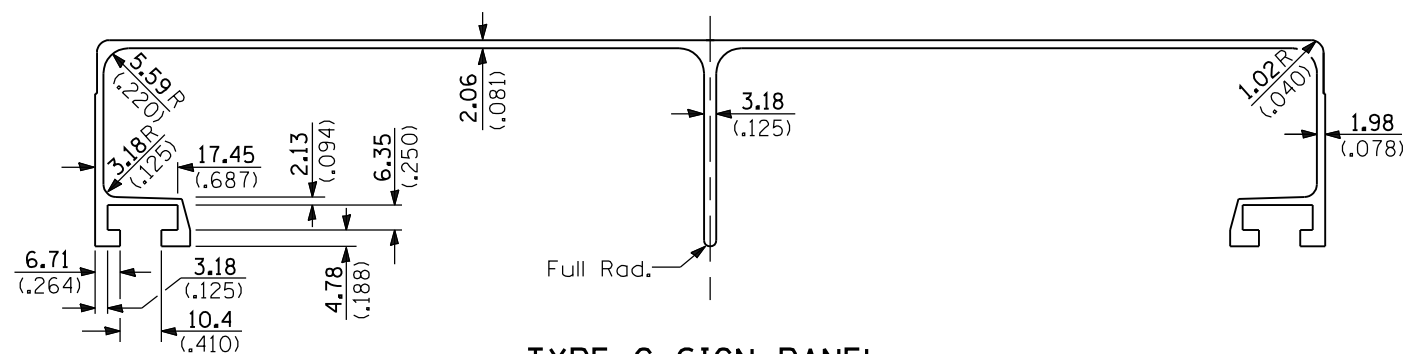

TYPE C SIGN PANEL

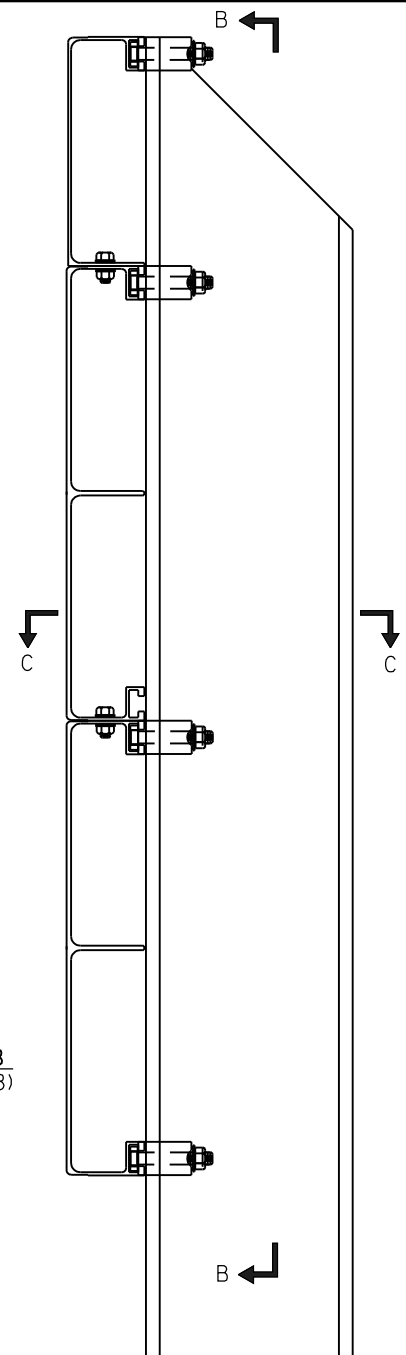


SECTION A-A

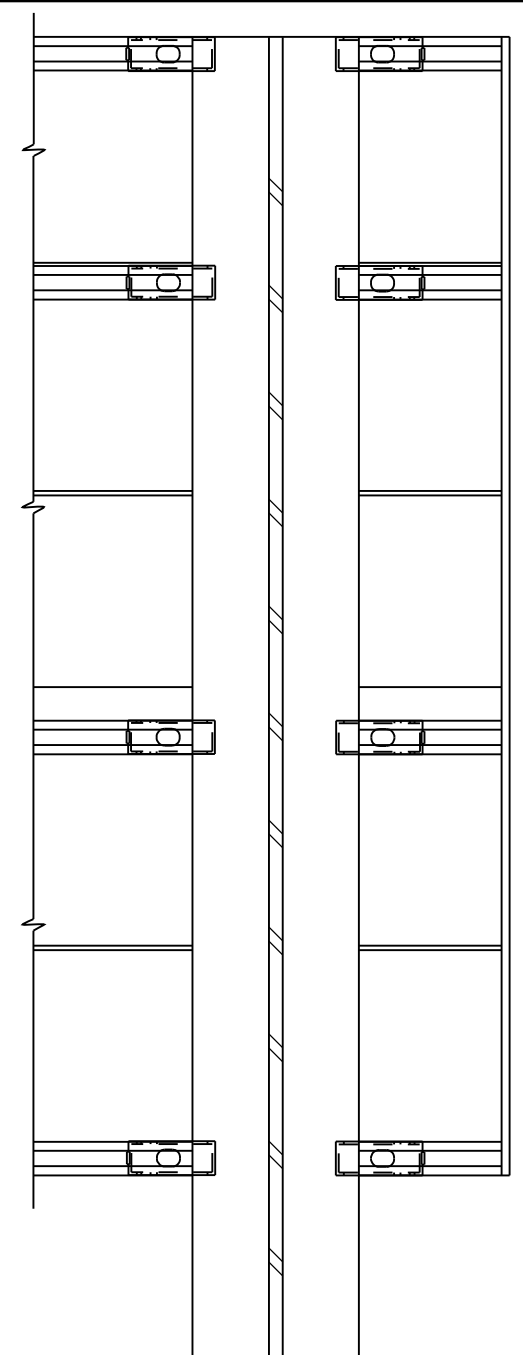


SECTION B-B

(Provide two post clips top and bottom. Alternate at interior panel joints on ground-mounted signs, and provide two clips at all panel joints on over-head mounted signs.)

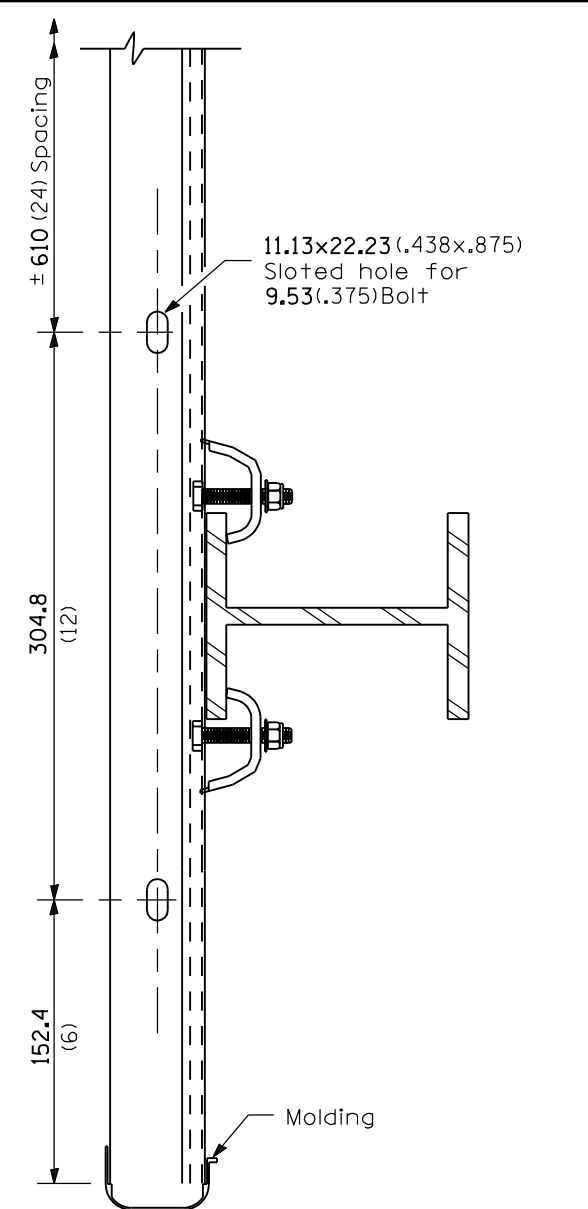

SECTION C-C

(w/o panel bolts)

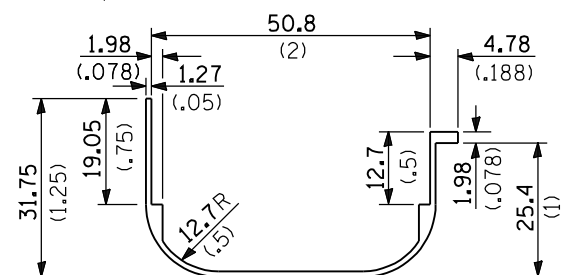

SIGN MOLDING

(Color shall match sign facematerial. To be riveted to sign panel at 600 (24) O.C.)


All dimensions are in millimeters (inches) unless otherwise shown.

DATE	REVISIONS
1-1-03	Revised stainless steel clip design, and
	minor changes.
1-1-00	New Standard.


# SIGN PANELS EXTRUDED ALUMINUM TYPE

(Sheet 1 of 2)

**STANDARD 720021-01**

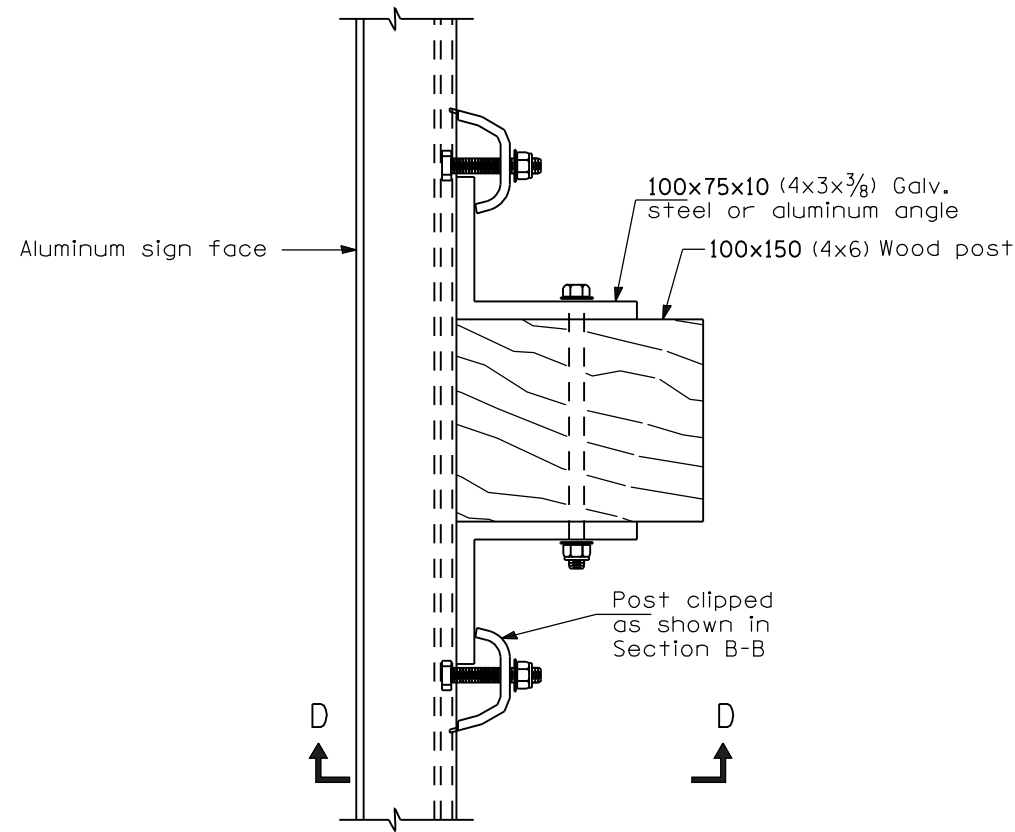


**SIGN PANEL ATTACHMENT  
TO WOOD POST**

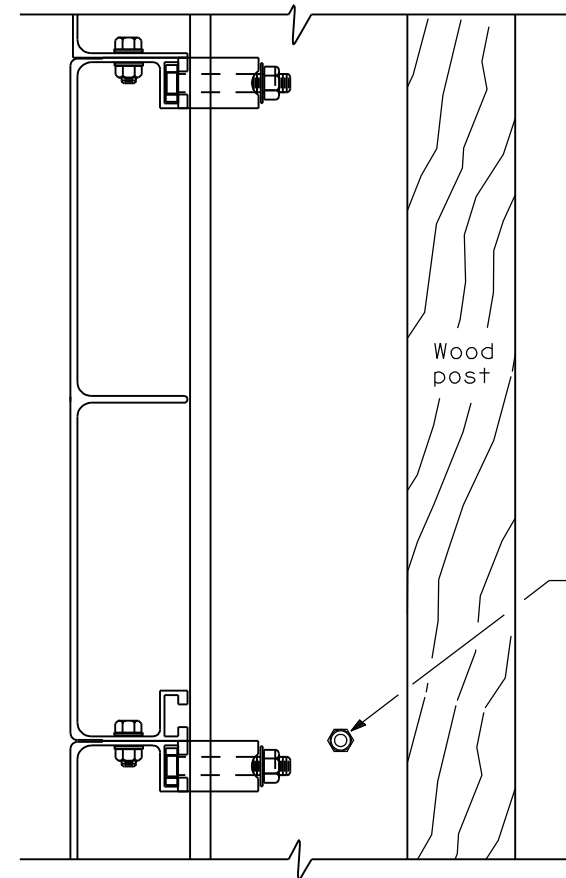


M10 ( $\frac{3}{8}$ ) Bolt with flat washer, lock washer and nut 450 (18) O.C. (min. of 3 bolts to be used)

**SECTION D-D**

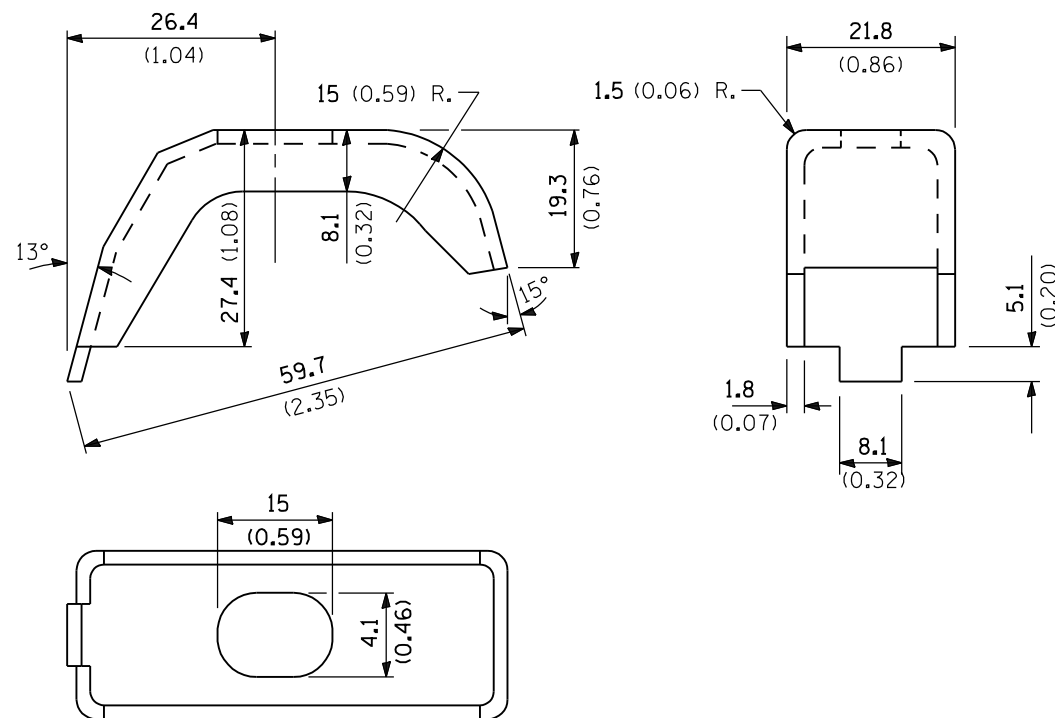

**STAINLESS STEEL CLIP**

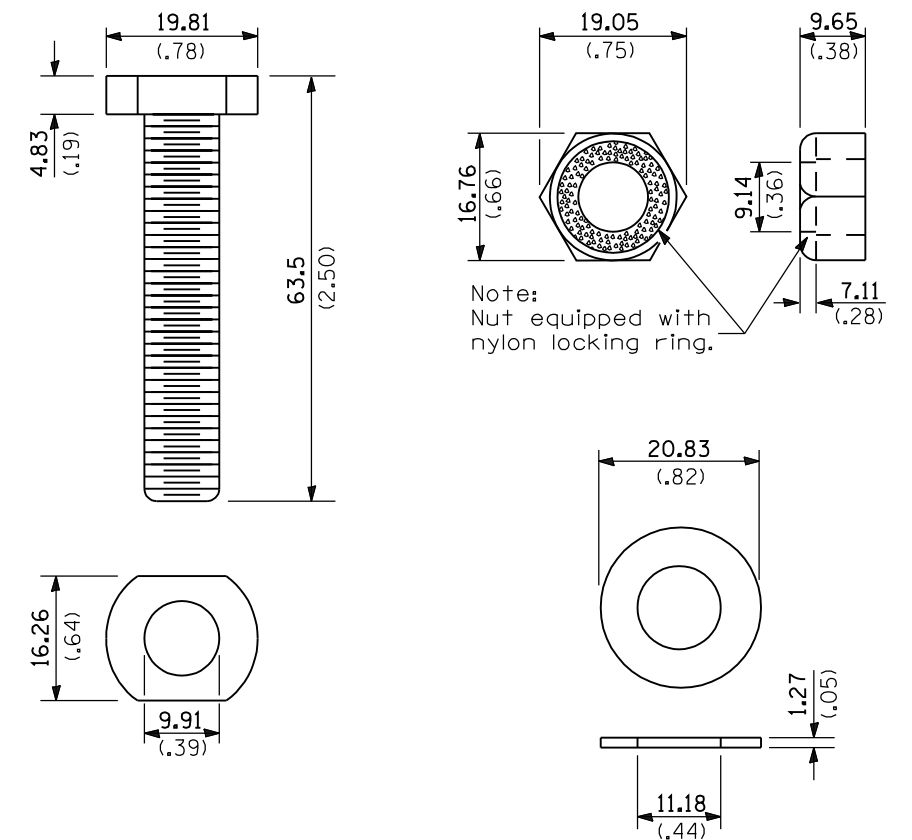

Note: Nut equipped with nylon locking ring.

**STAINLESS STEEL CLIP  
NUT, BOLT AND WASHER ASSEMBLY**